

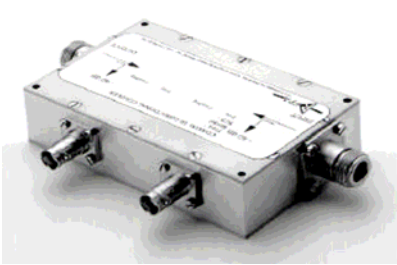
**RF BI DIRECTIONNAL COUPLER MODEL C 001-400/40/600**

This bidirectionnel power coupler is designed for reliable, trouble-free service.

**Features :**

\* 600 Watts

\* 40 dB coupling typ


**Specifications**

Characteristics	Data	Units
Frequency Range	0.01 - 400	MHz
RF power CW		
Typ.	650	W
Min	600	W
Coupling factor typ	40	dB
Flatness	+/- 1 dB	dB
Insertion loss	< 0.35 dB	dB
In/Out impedances nom.	50	Ohms
Input VSWR	<1.2 : 1	
Directivity	>15	dB
RF connectors	N Female	
Coupling connectors	BNC female	
Operating temperature range	-20 ° ... + 70	°C
Dimension (WxLxH)	BO03-28	
All data at room temperature +22°C, into 50 Ohms, subject to change without notice		

Made in France

 Site web : <http://m2s-argeles.fr/>