


RF BI DIRECTIONNAL COUPLER MODEL C 80-1000/40/250

This bidirectionnel power coupler is designed for reliable, trouble-free service.

Features :

* 250/300 Watts

* 40 dB coupling typ

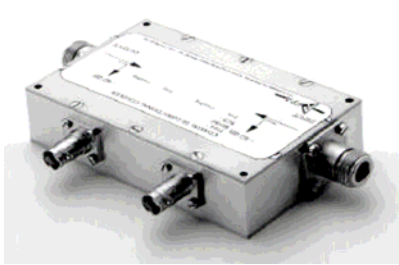

Specifications

Characteristics	Data	Units
Frequency Range	80 - 1000	MHz
RF power CW		
Typ.	300	W
Min	250	W
Coupling factor typ	40	dB
Flatness	+/- 1 dB	dB
Insertion loss	< 0.2 dB	dB
In/Out impedances nom.	50	Ohms
Input VSWR	<1.2 : 1	
Directivity	>20	dB
RF connectors	N Female	
Coupling connectors	BNC female	
Operating temperature range	-20 ° ... + 70	°C
Dimension (WxLxH)	85*70*22	
All data at room temperature +22°C, into 50 Ohms, subject to change without notice		

Made in France

Site web : <http://m2s-argeles.fr/>